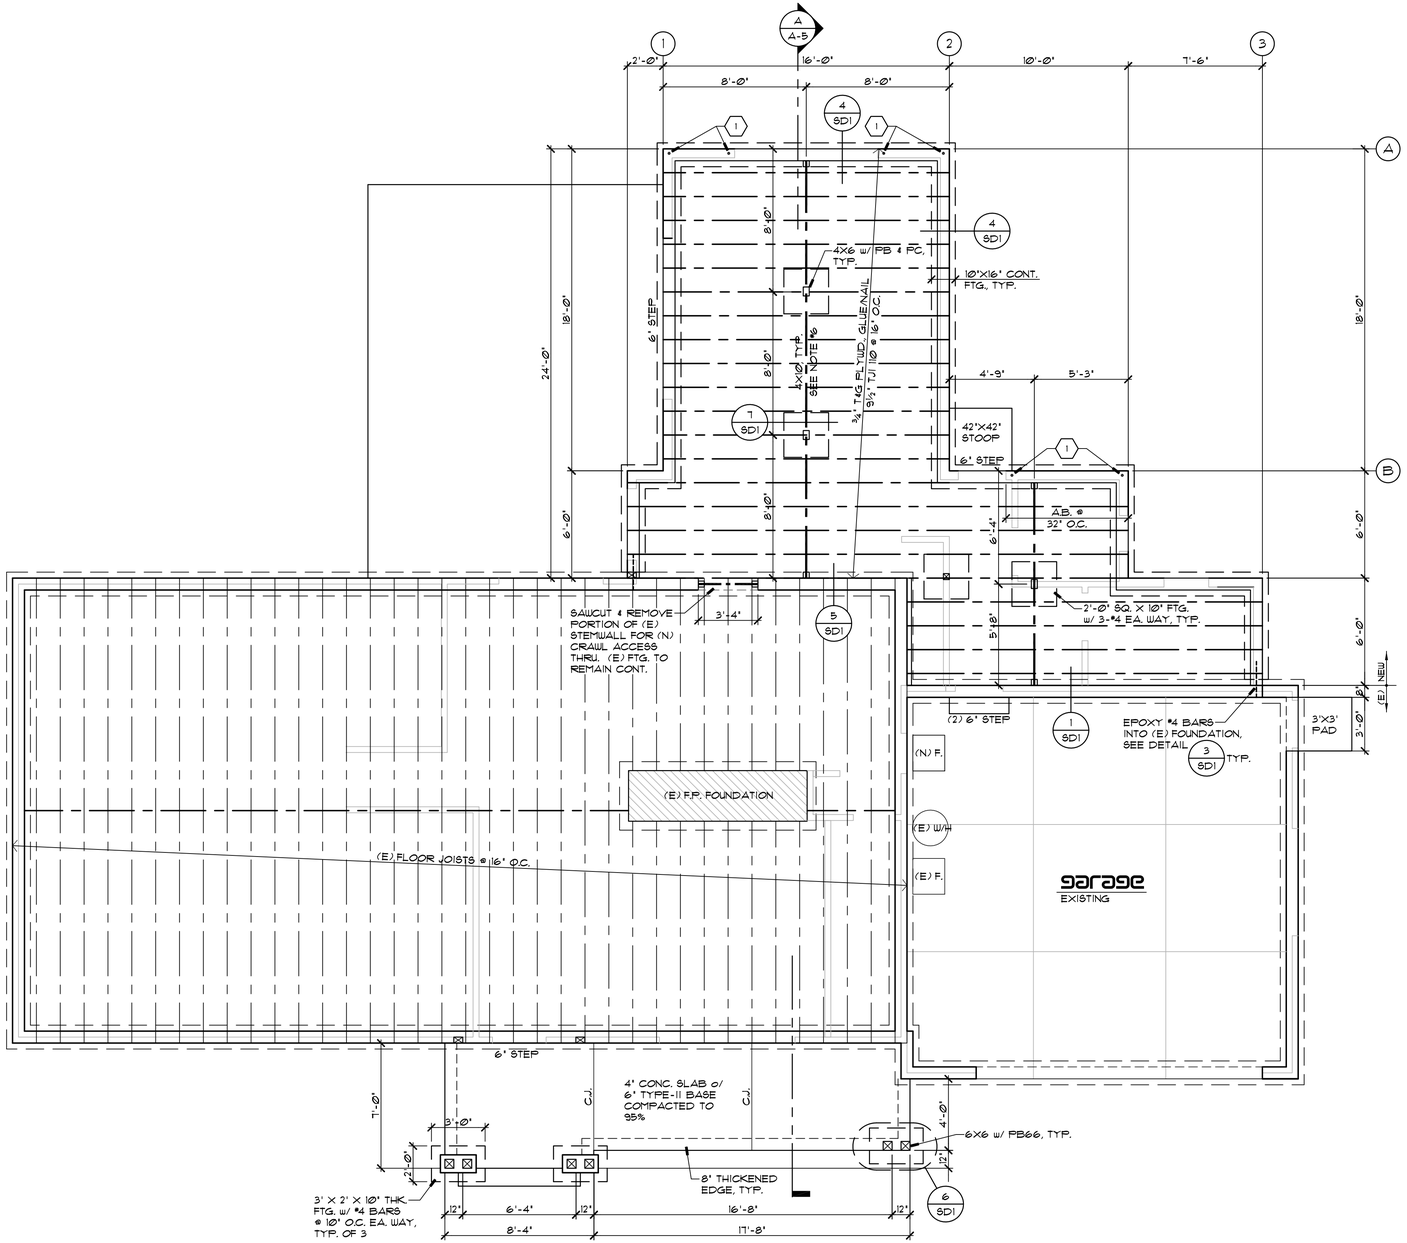

FOUNDATION PLAN

SCALE 1/4" = 1'-0"

north

CRAWL SPACE VENTILATION CALC'S.:

I.R.C. SECTION R4082 (Exception):

ADDED CRAWL SPACE AREA:	561 SQFT.
OPENING AREA @ 1/1500 (561 / 1500) (WITH VAPOR BARRIER)	0.37 SQFT.
6" X 14" VENTS (0.5 SQFT. PER VENT):	MIN. 1 VENT

1 VENT OPENING REQ'D. WITHIN 3 FT. OF EACH FOUNDATION CORNER (INTERIOR AND/OR EXTERIOR CORNER)

FOUNDATION NOTES:

1. SOILS ENGINEER SHALL EXAMINE SITE AFTER EXCAVATION & PRIOR TO SETTING ANY CONC. FORMS. SOIL'S ENGINEER RECOMMENDATIONS CONCERNING OVER EXCAVATION, COMPACTION, ETC. SHALL BE FOLLOWED.
2. CONC. FOOTINGS 16" X 10" w/ 2-#4 REBAR CONT., TYP. U.N.O. STEP FOOTINGS AS REQ'D. TO BEAR ON NATIVE GRADE OR AS DIRECTED BY SOILS ENGINEER. SEE EXTERIOR ELEV. FOR FOOTING & PIER DEPTHS (MIN. 2'-0") - FIELD VERIFY.
3. 8" CONC. FOUNDATION WALL w/ 1-#4 TOP & #4 VERT. @ 24" O.C. TYP. U.N.O. PROVIDE 5/8"ϕ X 12" A.B. @ 48" O.C. (U.N.O.) TO 2X6 P.T. SILL U.N.O. IN SHEAR WALL PLAN. PROVIDE 3X6 P.T. SOLE PL. @ GARAGE.
4. 9 1/2" TJI 210 FLOOR JOISTS @ 16" O.C. TYP. BLK. SOLID @ ALL SUPPORT LINES. PROVIDE 9 1/2" LSL RIM BD. THROUGHOUT, TYP. BLOCK SOLID UNDER ALL HOLDOWNS. PROVIDE CRUSH BLOCK, WEB STIFFENERS, ETC. PER JOIST MANUF.
5. 1 1/8" T&G PLYWD. APA RATED STURD-I-FLOOR - 48/24 w/ 10d @ 6" O.C. BOUNDARY, EDGES, AND DRAG STRUTS & 10d @ 10" O.C. FIELD - GLUE & NAIL THROUGHOUT, TYP.
6. TYPICAL FLOOR GIRDERS SHALL BE 4X10 DF#2 OR DBL. 1 3/4" X 9 1/2" 1.9E W.S. LVL'S, MAX. SPAN 10'-0" U.N.O. NAIL LVL'S TOGETHER w/ MIN. 2-ROWS OF 16d @ 12" O.C.
7. PROVIDE R-30 INSULATION @ RIM JOISTS & FLOOR. INSULATE ALL PIPES & DUCTWORK. INSTALL FLOOR INSULATION AFTER STRUCTURE IS WEATHERED IN.
8. WHERE NOTED, PROVIDE SOLID BLKG. UP TO SUB-FLOOR TO SUPPORT POSTS ABOVE. SEE FLOOR PLAN FOR LOCATIONS.
9. ALL FRAMING HARDWARE SHALL BE 'SIMPSON'. INSTALL PER MANUF. REQUIREMENTS.
10. PROVIDE 6" X 14" VENTS AT RIM JOISTS AS REQ'D., SEE CRAWL SPACE VENT CALCULATIONS, THIS SHEET. (1 S.F. PER 1500 S.F. OF AREA, WITHIN 3 FT. OF CORNERS.)
11. ALL SLABS TO BE 4" THICK CONCRETE w/ 6X6 10/10 WELDED WIRE FABRIC REINFORCING OR CONCRETE SHALL HAVE FIBERMESH ADDITIVE @ PLANT. SLAB SHALL BE PLACED OVER 6" TYPE-II BASE COMPACTED TO 95% ON COMPACTED NATIVE SOIL, IF SUITABLE.
12. APPLY CHEMICAL TERMITE TREATMENT TO INSIDE & OUTSIDE OF ALL FOUNDATION WALLS TO PROVIDE A UNIFORM TOXIC BARRIER IN ALL ROUTES OF TERMITE ENTRY. APPLY CHEMICALS PER MANUFACTURERS INSTRUCTIONS.
13. PROVIDE CRAWL SPACE DRAIN TO DAYLIGHT w/ 4"ϕ PVC PIPE & ANIMAL SCREEN AT DISCHARGE.
14. SEE SHEET SD1 FOR ADDITIONAL STRUCT. NOTES & SCHEDULES.

SALZANO
architect
5935 grass valley road
reno, nevada 89510
775.288.1984 cell
ajsalzano@aol.com
www.alsalzano.com

1-10-26

REVISIONS:

1

2

3

residential addition

POR: lisa stone
65 livermore drive
reno, nevada

all designs & drawings as instruments of service are copyright by the architect under provisions of nrs 628. unauthorized duplication of designs or distribution of drawings is prohibited.

DRAWING TITLE:

FOUNDATION PLAN

APPROVALS:

JOB NO.: 2522

A-2

©2010

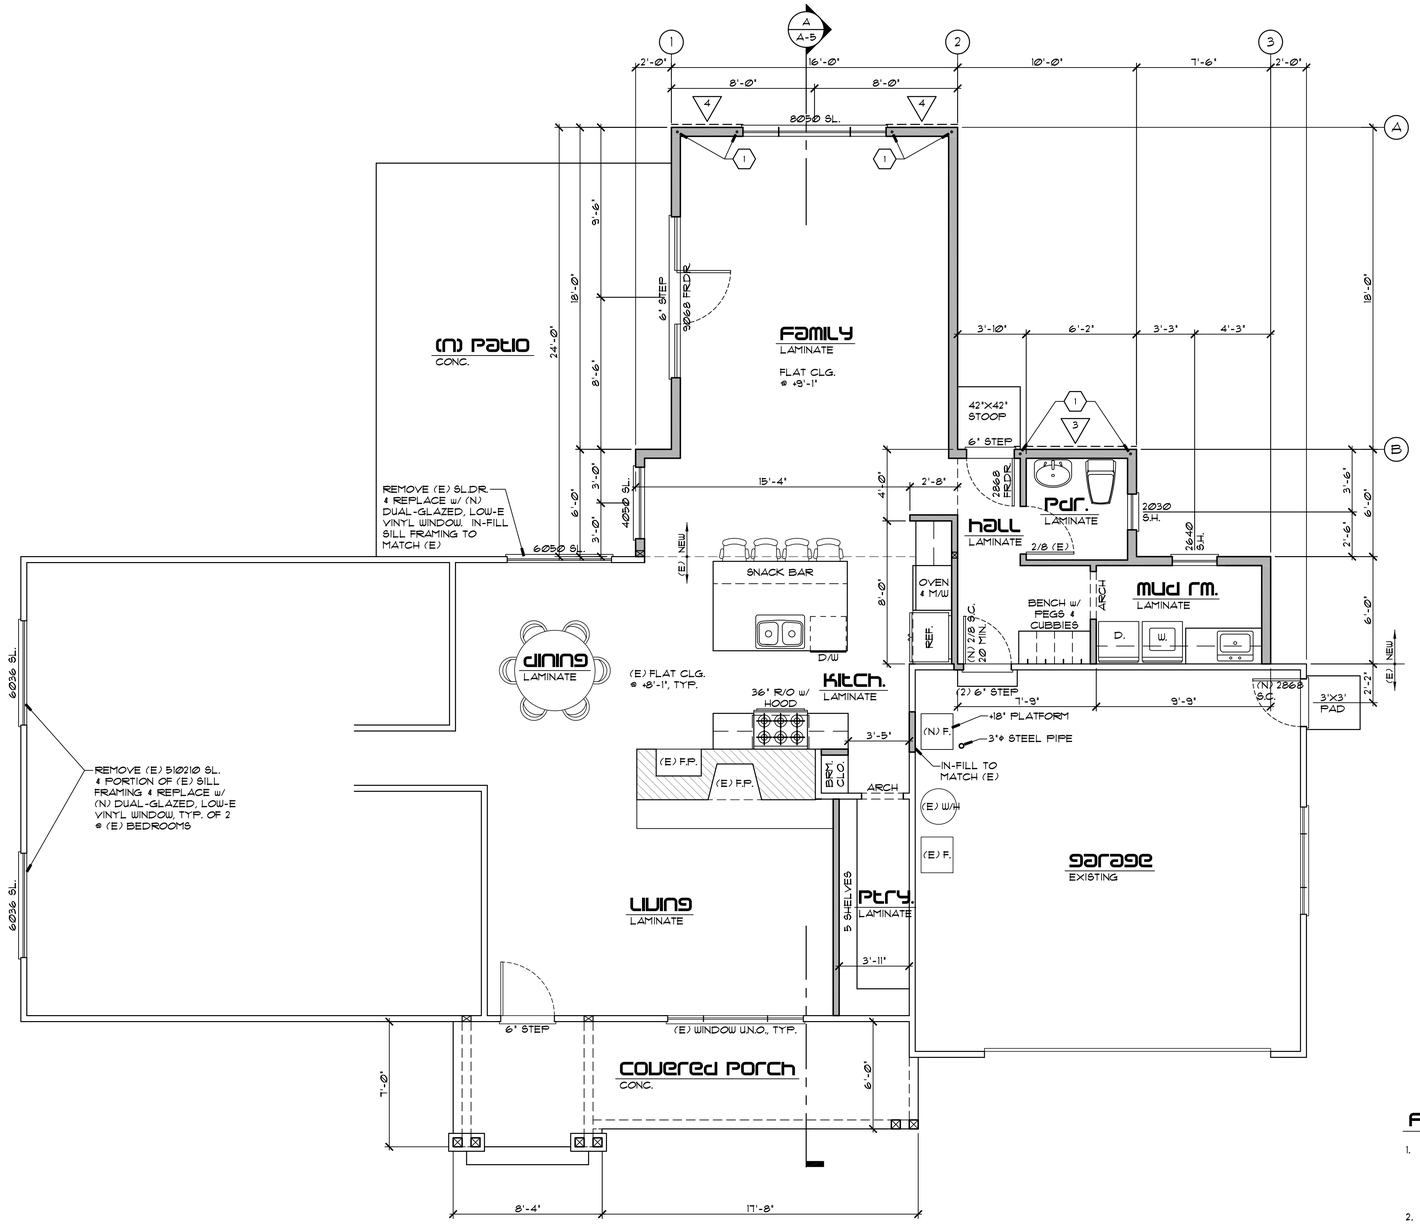

NOTE:
USE TYPE 6 SHEAR WALLS ON ALL EXTERIOR WALLS U.N.O.

FLOOR PLAN

SCALE 1/4" = 1'-Ø"

north

(E) LIVABLE AREA APPROX. 1,300 SQ.FT.

ADDITION LIVABLE AREA APPROX. 624 SQ.FT.

(N) TOTAL LIVABLE AREA APPROX. 1,924 SQ.FT.

(E) GARAGE AREA APPROX. 475 SQ.FT.

(N) COVERED PORCH AREA APPROX. 163 SQ.FT.

FLOOR PLAN NOTES:

1. (N) EXTERIOR WALLS SHALL BE 2X6 STUDS @ 16" O.C. w/ MIN. ½" CDX PLYWD. (OR EQUAL) SHEATHING (1/8" GAP @ ALL EDGES) VAPOR BARRIER & R-21 INSUL., TYP. INTERIOR NON-BEARING WALLS SHALL BE 2X4 @ 16" O.C. U.N.O. PROVIDE FOAM SILL SEAL @ ALL EXTERIOR WALLS.
2. ½" G.W.B. @ WALLS & ⅝" G.W.B. @ CEILINGS TYP. USE ⅝" FIRE-X G.W.B. IN GARAGE & TILE BACKER BD. IN WET AREAS. ALL DRYWALL CORNERS SHALL BE BULLNOSED.
3. SEE FOUNDATION PLAN FOR ADDITIONAL DIMENSIONS.
4. TYPICAL PLATE HEIGHT IS 9'-1" A.F.F. (U.N.O.); WINDOW HEADER HEIGHT IS 6'-8" A.F.F. (U.N.O.); INTERIOR DOOR HEIGHT IS 6'-8" A.F.F. (U.N.O.)
5. ALL CEILING FRAMING SHALL BE @ 24" O.C. AS FOLLOWS:
   2X4'S MAX. SPAN 9'-Ø"
   2X6'S MAX. SPAN 14'-Ø"
   2X8'S MAX. SPAN 18'-6"
6. WHERE POSSIBLE VENT PLUMBING & FLUES TO REAR OF RESIDENCE.
7. SEE EXTERIOR ELEVATIONS FOR SPECIALTY WINDOWS. ALL (N) GLAZING SHALL BE LOW-E COATED, DUAL GLAZED.
8. PROVIDE SILL PANS @ ALL EXTERIOR DOORS & WINDOWS.
9. PROVIDE CIRCULATION PUMP FOR HOT WATER SYSTEM & INSULATE ALL PIPES (MIN. R-2). SEE SCHEMATIC ON ME-1.
10. GAS APPLIANCES SHALL BE A.G.A. RATED & INSTALLED PER MANUF. SPECIFICATIONS.
11. INSULATE ALL INTERIOR WALLS, USE R-11 @ 2X4 WALLS & R-19 @ 2X6 WALLS, TYP.
12. MAX. LENGTH OF HVAC FLEX-DUCT NOT TO EXCEED 25'-Ø".
13. PROVIDE FIRE BLOCKING @ MAX. 10'-Ø" O.C. HORIZ. AT ANY WALL(S) THAT EXCEED 10'-Ø" IN HEIGHT.
14. SEE SHEET SD1 FOR ADDITIONAL STRUCT. NOTES & SCHED's.

SALZANO architect
5935 grass valley road
reno, nevada 89510
775.288.1984 cell
ajsalzano@aol.com
www.alsalzano.com

1-15-26

REVISIONS:
1
2
3

residential addition

POR: lisa stone
65 livermore drive
reno, nevada

all designs & drawings as instruments of service are copyright by the architect under provisions of ncs 623. unauthorized duplication of designs or distribution of drawings is prohibited.

DRAWING TITLE:

FLOOR PLAN

APPROVALS:

JOB NO: 2522

A-3

11/2018

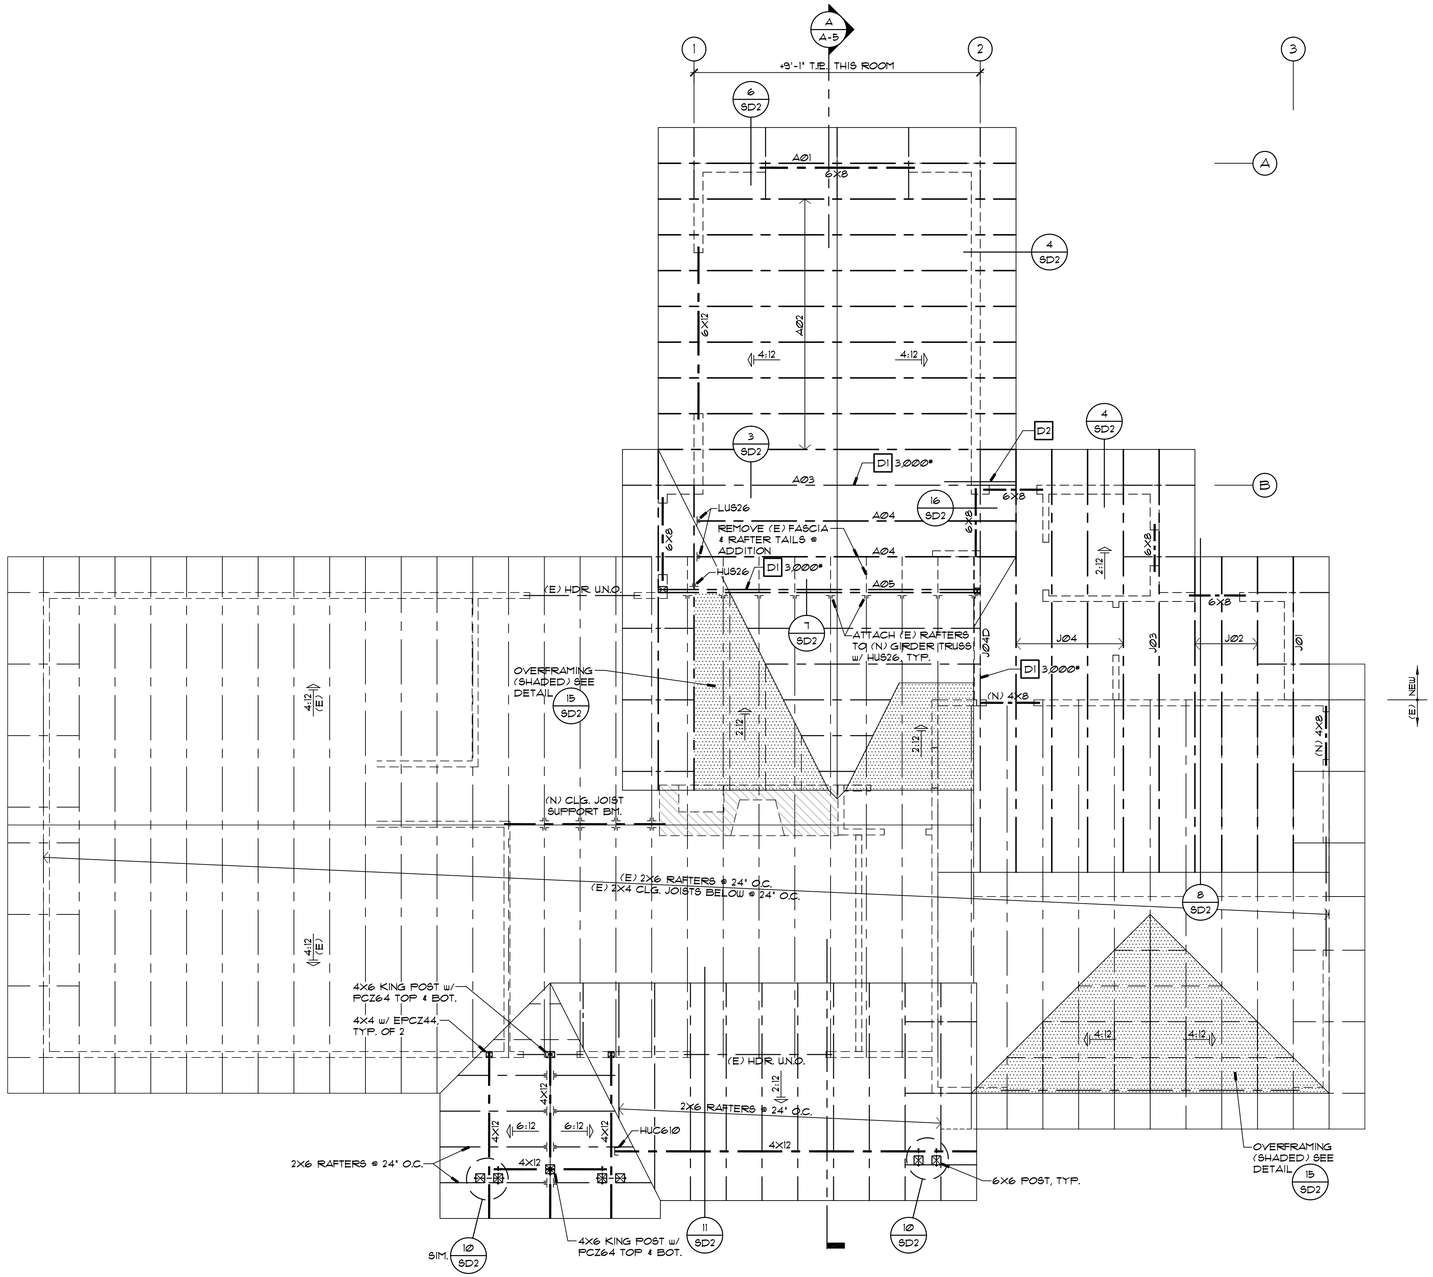

ROOF FRAMING PLAN

SCALE 1/4" = 1'-0"

north

attic ventilation calc's.:

I.R.C. SECTION R806.2:

ADDED ATTIC AREA:	561 SQFT.
OPENING AREA @ 1/300 (561 / 300) 50% @ RIDGES & 50% @ EAVES:	1.87 SQFT. 0.94 SQFT. EACH
MIN. 5.5 L.F. RIDGE VENT REQ'D.	
EAVE VENTING (TOTAL PERIMETER): (4) 2"ø HOLES PER VENT BLK.:	55 L.F. 0.087 SQFT. EACH
VENTING BLOCKS @ 4'-0" O.C.: 55 L.F. / 4 L.F. = 14 BLK's. X 0.087 SF./ BLK. =	1.22 SQFT. > 0.94 SQFT.

pre-fabricated truss notes:

1. TRUSS MANUF. SHALL BE RESPONSIBLE FOR ALL ENGINEERING, LAYOUT DRAWINGS, CONNECTIONS, BLOCKING, BRACING & TRUSS ERECTION INFORMATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER COORDINATION BETWEEN THE ARCHITECT's DRAWINGS, TRUSS MANUF. INFORMATION, ANY REQ'D. FIELD CHANGES, PROPER INSTALLATION OF FINAL PRODUCT & IT's CONFORMANCE TO THE ARCHITECT'S DESIGN. THE ARCHITECT & STRUCTURAL ENGINEER ASSUME NO LIABILITY FOR SAID PRODUCT.

2. USE PRE-ENGINEERED MANUFACTURED TRUSSES @ 24" O.C. SOLID BLOCK @ SUPPORTS & PER MANUFACTURER'S SPECIFICATIONS. USE SIMPSON H-1 @ EA. SUPPORT WALL/BEAM TO EA. TRUSS & H-5 @ EA. SUPPORT WALL/BEAM TO EA. GIRDER TRUSS. HANG TRUSSES @ GIRDER TRUSSES w/ SIMPSON HUS26 OR AS SPECIFIED ON PLAN.

roof framing notes:

1. ROOF LOADS: SNOW 33# SQ. FT. ; DEAD 26# SQ. FT.

2. ALL FRAMING HARDWARE NOTED SHALL BE "SIMPSON" INSTALL PER MANUF. REQUIREMENTS.

3. TYP. ROOF SHEATHING SHALL BE MIN. 19/32" STRUCT. II CDX PLYWD. OR O.S.B., P.I. = 40/20 w/ 10d @ 6" O.C. BOUNDARY & EDGES, 4" O.C. @ DRAG TRUSSES & 12" O.C. @ FIELD. SEE STRUCT. DRAWINGS FOR UPLIFT NAILING ZONES. LAY PLYWD. PERP. TO SUPPORTS & STAGGER ALL JOINTS, TYP.

4. FILL-IN FRAMING (SHADED AREAS) SHALL BE: 2X6 RAFTERS @ 24" O.C., MAXIMUM SPAN 6'-0" - POST UP AS REQUIRED. USE 2X8 RIDGES & HIPS, MAXIMUM SPAN 6'-0" - POST UP AS REQUIRED. CONTINUE LOWER ROOF PLYWD. UNDER FILL-IN FRAMING & PROVIDE 22"X30" ACCESS & VENTILATION TO CONCEALED SPACES PER I.R.C.

5. PROVIDE DOUBLE STUDS BELOW ALL GIRDER TRUSSES, TYP. U.N.O.

6. PROVIDE ROOF VENTILATION PER I.R.C. (1 SQFT. PER EA. 300 SQFT. OF ATTIC AREA). SEE ATTIC VENTILATION CALC'S. PROVIDE R-49 INSUL. THROUGHOUT ATTIC w/ INSUL. BAFFLES @ EAVE VENTS, TYP. PROVIDE MIN. 22"X30" ACCESS FROM (E) ATTIC AREAS TO NEW, TYP.

7. BEAM ELEV. NOTED ARE FROM FINISH FLOOR TO TOP OF BEAM.

8. ALL GLU-LAM BEAMS SHALL BE DOUG-FIR 24F-V4 U.N.O.

9. 6X8 DF#1 TYP. HEADER U.N.O.

10. PROVIDE 2X8 FASCIA w/ DRIP EDGE FLASHING, TYP.

11. USE 24-16d BETWEEN TOP PLATE (T.P.L.) SPLICES w/ MIN. 6'-0" LAP, TYP. U.N.O.

12. USE 2X6 FLAT w/ 2X6 STRONGBACK @ 24" O.C. @ GABLE END FRAMING.

13. PROVIDE G.I. FLASHING @ ALL VALLEYS & ROOF-TO-WALL CONNECTIONS, TYP. PROVIDE BITUTHANE MEMBRANE @ ROOFS SLOPING LESS THAN 3:12 & AS NOTED ON ROOF PLAN. PROVIDE CONT. RIDGE VENTS @ ALL RIDGES, TYP.

14. SEE SHEET SD-1 FOR ADDITIONAL STRUCT. NOTES & SCHEDULES.

15. SEE TRUSS CALC's FOR PERMANENT LATERAL TRUSS BRACING SPEC'S.

SALZANO architect
5935 grass valley road
reno, nevada 89510
775.233.1984 cell
ajsalzano@aol.com
www.alsalzano.com

1-10-26

REVISIONS:

1

2

3

residential addition

POR: lisa stone
65 livermore drive
reno, nevada

all designs & drawings as instruments of service are copyright by the architect under provisions of nrs 623. unauthorized duplication of designs or distribution of drawings is prohibited.

DRAWING TITLE:

ROOF FRAMING PLAN

APPROVALS:

JOB NO.: 2522

A-4

©2010

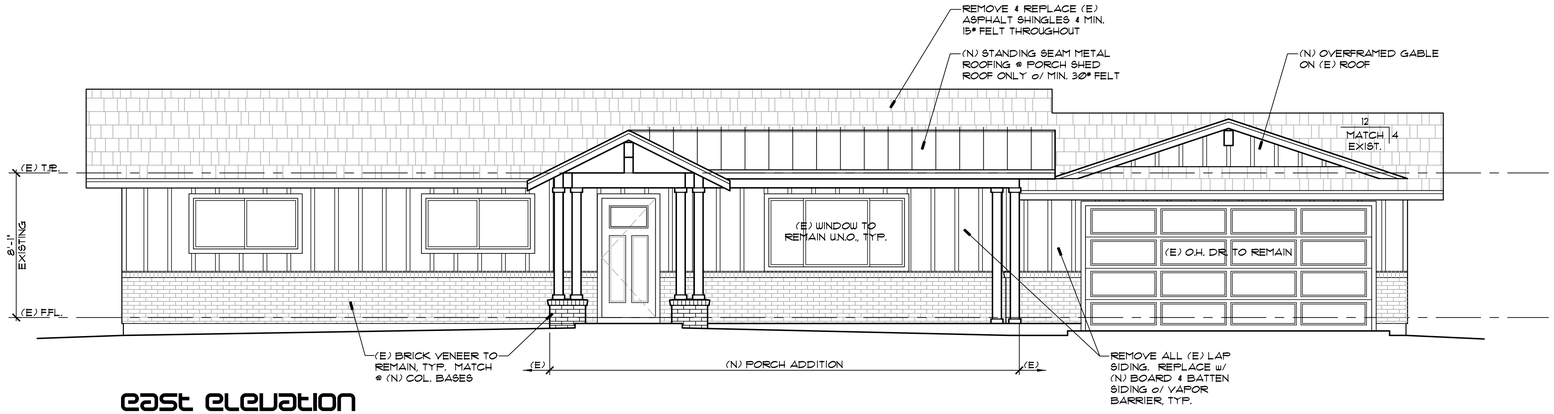

east elevation

SCALE 1/4" = 1'-0"

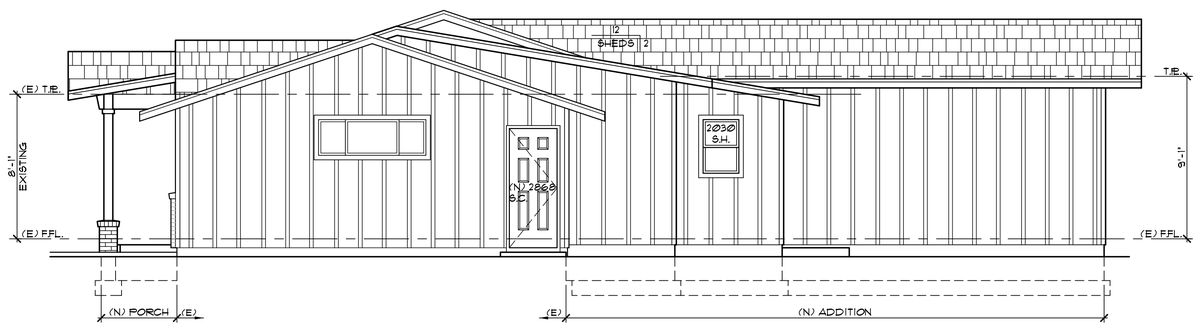

north elevation

SCALE 1/4" = 1'-0"

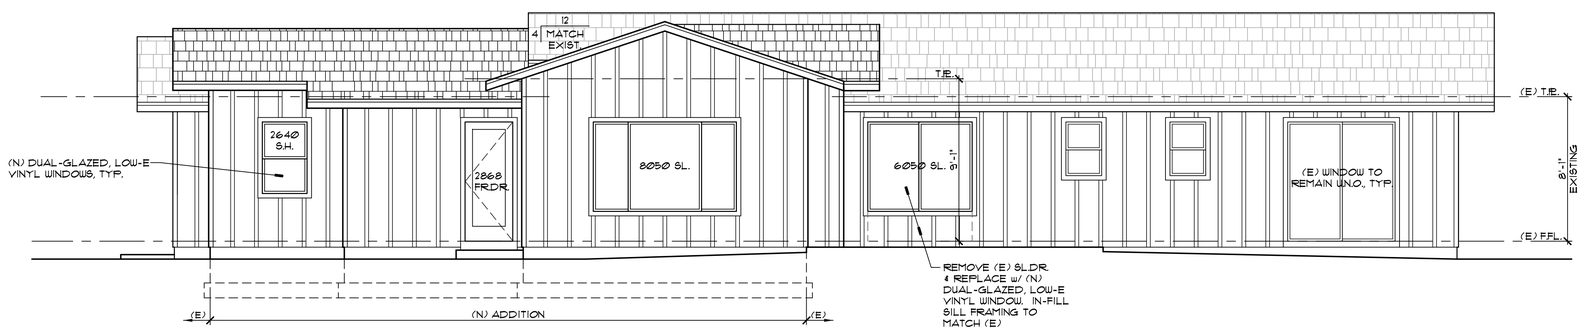

west elevation

SCALE 1/4" = 1'-0"

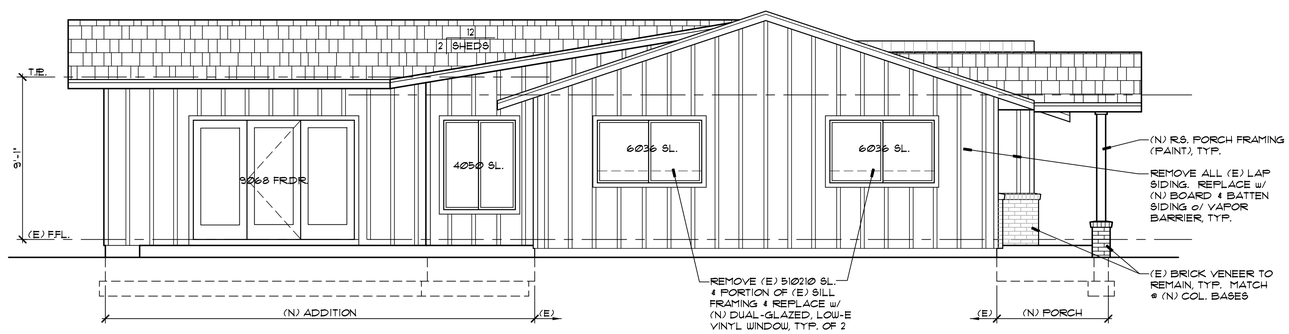

south elevation

SCALE 1/4" = 1'-0"

SALZANO architect
5935 grass valley road
reno, nevada 89510
775.233.1984 cell
ajsalzano@aol.com
www.alsalzano.com

1-15-26

REVISIONS:

1

2

3

addition residential

FOR: lisa stone
65 livermore drive
reno, nevada

all designs & drawings as instruments of service are copyright by the architect under provisions of nrs 623. unauthorized duplication of designs or distribution of drawings is prohibited.

DRAWING TITLE:

EXTERIOR ELEVATIONS

APPROVALS:

JOB NO.: 2522

A-6

AUZALO